

AC 825

Cummins
Mecc Alte
D+ &



ISO8528

GC ;) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#(#

z) \$ z' z' D:

	"	kw	"	kw	Amp
400/230	825,00	660,00			0,00

fP GDE GC ;) &

) & z fDF D% \$! % % & GC " \$(* z& GC

Standard Specifications

z

fl ! E

z

ALTERNATOR

fl E
fl " E
fP \$\$\$ \$\$\$ E

TRANSFER SWITCH

AC 825

Cummins
Mecc Alte
D+ &''

Manufacturer		Cummins		
Model		VTA 28 G6		
		% \$ \$' "# "		
		722,00 kw [968,00HP]		
	L	28,000		
	"	140 x 152		
		13,1:1		
	fl # 7	"# "	1500	
	fl 7	L	83,00	
		L	170,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	54,84		
	' # "	651,00		
	' # "	132,72		
	° C	489,00		
		24 V d.c.		
	Load	% \$ \$i	'+) i) \$i
	# "	163,60	133,00	91,00


		Mecc Alte
		ECO40-VL/4
	Hz	50
	"	750,00
7cg'		0,80
		3
	fl 7	400/230
	A	1084,00

		fl 7		fl 7	
	"	"	"	"	L
AC 825	5610,00	3950,00	1550,00	2270,00	1000,00
		fl 7		fl 7	
	"	"	"	"	L
MS 85	7170	5297	1606	2656	1000

AC 825

Cummins
Mecc Alte
D+' &'

1 D+' &'

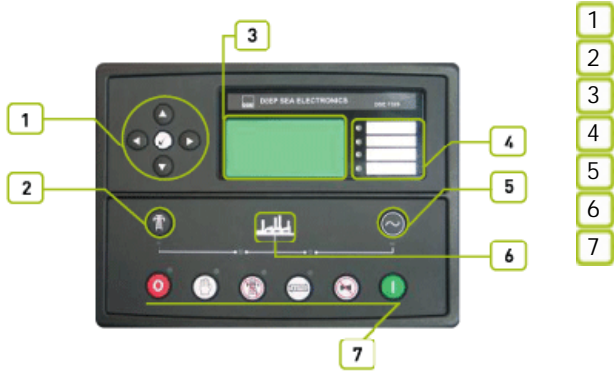

2

8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5

8G9+' &\$ž &&\$' ž

8G9+' &\$ž 8G9+' &\$ž

ž

% &1 *('

žFG&' &žFG(,) ž

ž

AC 825

Cummins
Mecc Alte
D+ &

f@#@Bl
f@#@!@t

"z" "z" "z"

f@#@Bl

971

#

#

#

#

#

6G'9B**\$-)\$

6G'9B**%\$\$\$!*!&

6G'9B**%\$\$\$!*!(

f&%) +t

f&)(, t

f&% \$t

GA 8

!&+""

%, !&*(

&(\$)


ž

ž

ž

AC 825

Cummins
Mecc Alte
D+ & "

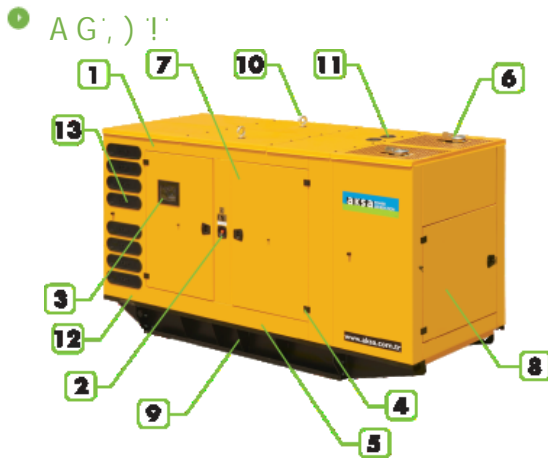

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	5297
fl "L	"	2656
	L	1000